



DCP552B Mark II

DigitroniK

Digital Control Programmer

The DCP552B Mark II is a two-channel advanced-function programmable controller (up to 49 program patterns), to which thermocouple, resistance temperature detector (RTD), DC voltage and DC current can be applied as input signals.

Features include 16 event outputs, 16 remote switch inputs and memory card interface.



DIGITAL CONTROLLERS

Specifications

Program pattern	No. of programs	49 x 2 channels
	No. of segments	99/program (2000 in total)
	Segment time	0 to 500/h or 0 to 500/min, 0.0 to 3000.0/s
	Sub-functions	Event, PID group, output limiter group, g. soak, PV shift and repeat setting
	PID group	Group 0 (continuing from previous segment), groups 1 to 9 Group A (automatic changeover) ON-OFF control settable
	Output limiter group	Group 0 (continuing from previous segment), group 1 to 9 settable
	G. soak	Type (start point, end point, all) and g. soak width 0 to 1000U settable
	PV start	Type settable for each program (ascending, descending and bi-directional)
	Cycle	Cycle count No. settable for each program
	Pattern link	Program No. 0 to 49 (program 0 without link) settable for each program
	Tag	8 characters consisting of alphanumeric and symbols settable for each program
	Basic time accuracy	± 0.01% (segment time setting = 0, repeat and cycle delays 0.1 sec. for each time)
	PV input	No. of channels
Type		Thermocouple, RTD, DC voltage, DC current multi-range
Accuracy		±0.1% FS
Sampling cycle		0.1s
Bias		-1000 to +1000U (U: industrial unit)
Remote switch input (RSW)	No. of inputs	16
	Function	Fixed: RUN, HOLD, RESET, ADV, program No., CH1 and CH2 operation cancelled Variable: RAMP-E, FAST, AT, AUTO/MANUAL, G. SOAK reset direct/reverse operation, auto-load, O2 selection check
	Type	Dry relay contact and open collector
Indication & setting	Indicator	2 or 5-digit, 7-segment LED (green or orange)
	Profile display	7 orange LEDs
	Message display	Output graph, deviation graph, event status and others
Control	Control mode	Program or constant value control
	Control output	5G CH1 & 2 and AUX CH1 & 2 : 4 to 20mAdc. 6D CH1 & 2: voltage. 8D CH1 & 2: open collector.
	Output accuracy	±0.1% FS
	PID auto-tuning	Automatic setting of PID value by limit cycle system
	No. of PID sets	16 for program operation (9 for segment specific + 7 for automatic zone selecting)
	MV limit (%)	Lower: -5.0 to upper limit Upper: Lower limit to 105.0
	MV change limit	0.1 to 110.0%/0.1 s
	Direct/reverse	Changeover settable
	Auxiliary (AUX) output	1 or 2 out of SP1, SP2, dev.1, dev.2, MV, PV1 and PV2
Event (EV) output	No of outputs	16
	Type	PV-, time-, code- and mode-based
Communications	RS-485, RS-232C	
General	Memory backup	RAM backed up by lithium battery
	Power	100 to 240Vac, 50/60Hz
	Power consumption	30VA at 100Vac, 40VA at 200Vac
	Ambient temperature	0 to 50°C
	Ambient humidity	10 to 90% RH (without condensation)
	Standards compliance	CE: EN61010-1, EN61326
	Mass	Approx. 1.5kg

Selection Guide

I II III IV V Example: DCP552B20000

Segment	Model No. selection		Description
I	Basic No.	DCP552B	Digital control programmer Mark II
II	PV input	2	2 channels
III	Correspondence to carbon potential	0	None
IV	Option 1	1	Provided
		0	None
		1	1 auxiliary output
V	Option 2	2	2 auxiliary outputs and RS-485, RS-232C communications
		00	None
		D0	With test data
		Y0	With traceability certification

Accessories (sold separately)

Model No.	Description
81446141	Soft dustproof cover
81446140-001	Lithium battery
SLP-P55J60	PC Loader software
SLP-P55J61	PC Loader software without loader cable

Input Types and Ranges

• Thermocouple

Range code	Input type	Range (°C)
16	K (CA)	-200.0 to +200.0
0		0.0 to 1200.0
1		0.0 to 800.0
2		0.0 to 400.0
3	E (CRC)	0.0 to 800.0
4	J (IC)	0.0 to 800.0
5	T (CC)	-200.0 to +300.0
6	B (PR30-6)	0.0 to 1800.0
7	R (PR13)	0.0 to 1600.0

Range code	Input type	Range (°C)
8	S (PR10)	0.0 to 1600.0
9	W (WRe5-26)	0.0 to 2300.0
10		0.0 to 1400.0
11	PR40-20	0.0 to 1900.0
12	N	0.0 to 1300.0
13	PL II	0.0 to 1300.0
14	Ni-Ni-Mo	0.0 to 1300.0
15	Gold-iron/Chromel	0.0 to 300.0K (K: Kelvin)

• Resistance temperature detector (RTD)

Range code	Input type	Range (°C)
64	JIS '89 Pt100 (IEC Pt100Ω)	-200.0 to +500.0
65		-200.0 to +200.0
66		-100.0 to +150.0
67		-50.0 to +200.0
68		-40.0 to +60.0
69		0.0 to 100.0
70		0.00 to 300.0
71		0.00 to 500.0

Range code	Input type	Range (°C)
96	JIS '89 Pt100	-200.0 to +500.0
97		-200.0 to +200.0
98		-100.0 to +150.0
99		-50.0 to +200.0
100		-40.0 to +60.0
101		0.0 to 100.0
102		0.0 to 300.0
103		0.0 to 500.0

• DC current/voltage

Range code	Input type	Range
48	mA (Linear)	4 to 20mA
52		2.4 to 20mA
49	mV (Linear)	0 to 10mV
50		-10 to +10mV
51	mA (Linear)	0 to 100mV
128		4 to 20mA
134	V (Linear)	2.4 to 20mA (Decimal point position)
129		0 to 1V
130	V (Linear)	-1 to +1V
131		1 to 5V
132		0 to 5V
133		0 to 10V

Range code	Input type	Range
135	O ₂ sensor (Note)	0 to 1250mV. Carbon potential (CP value) indication range: 0.000 to 4.000% C. (Note, however, that PID control is calculated over the 0.000 to 2.000% input range). Oxygen pressure indication range: 0.000 to 1.500 x 10 ⁻²⁰ atm.


Note: • Any O₂ sensor made by Japan Glass Co., Ltd., Marathon Monitors, Cambridge, Corning, AACC (Advanced Atmosphere Control Corporation), Barber Colman or Furnace Control can be used.

- PV2 is fixed for the O₂ sensor in the case of models supporting carbon potential.
- °F display is selectable.

Dimensions

(Unit: mm)

• DCP552B

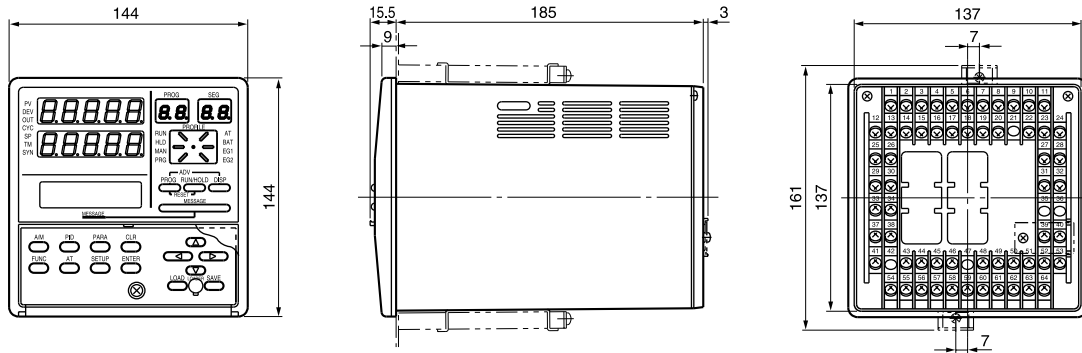

• Panel cutout

